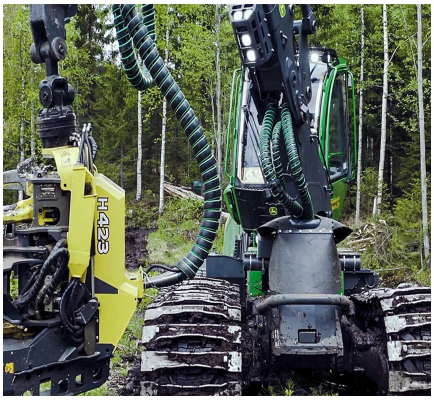


H423

Key Specs

Weight Without Rotator and Link - 955 kg
Maximum Cut Diameter - 580 mm
Maximum Feed Speed - 4.8-5.6 m/s
Maximum Roller Opening - 560 mm

Dimensions

Width, Head Open - 1480 mm
Width, Head Closed - 1150 mm
Height Without Rotator and Link - 1350 mm
Weight Without Rotator and Link - 955 kg

Felling/Cutting

SuperCut 100S Saw Unit, Automatic Chain Tensioning - Standard
Maximum Cut Diameter - 580 mm
Length Of Saw Bar - 640/750 mm
Chain Type - 404
Chain Speed - 40 m/s

Feed System, Four-Wheel-Drive

Gross Feed Force - 315 / 500-cc motors: 23 kN
Maximum Feed Speed - 4.8-5.6 m/s
Maximum Roller Opening - 560 mm

Delimbing

Delimbing Knives - 4 moving, 2 fixed
Delimbing Diameter, Tip To Tip - 420 mm
Maximum Opening Upper Knives - 560 mm
Maximum Opening Lower Knives - 570 mm

Hydraulic System

Maximum Operating Pressure - 28 MPa
Recommended Pump Capacity - 240–280 L/min

Tank Capacities

Color Marking - Yes
Chain Grease - 1.2 kg

Optional Equipment

Stump Treatment - Yes
Multi-Tree-Handling (MTH) - Yes
Mense Feed Rollers - Yes
Steel Thumbnail Feed Rollers - Yes
Steel V-Profile Feed Rollers - Yes
Steel Ribbed Feed Rollers - Yes
Chain And Saw Bar Kits - Yes
Hydraulic Hose Kit - Yes
Top Saw - No